



**CHOSEN BY LEADING
COMPONENT MANUFACTURERS
WORLDWIDE**

AUTOMATIC SCREEN PRINTING LINE P - series



- Automatic sheet handling, printing, drying process
- Two models available to meet all customer requirements
- Fully programmable printing parameters
- Print/print, print/flood, flood/print, on contact print, stencil printing, via filling and screen cleaning printing
- Extensive options for demanding advanced technology applications

**AUTOMATIC HIGH PRECISION SCREEN
PRINTING PROCESS**

BASIC CONFIGURATION:

The P-series of screen printers offer the possibility to automatically screen print on green ceramic tapes, ceramic or glass substrates, etc. in the production of electronic components e.g. LTCC, HTCC, MLCC, Hybrids, etc.

There are 2 main models base on similar mechanical designs, with a wide range of options available.

As an option, sheets or substrates can be

automatically loaded from a magazine into the printing table, screen printed, dried and placed back into another magazine. The main difference between the S (standard) and the A (advanced) models is in the sheet or substrate registration.

On the S model the registration is done mechanically (usually with pins), while in the A model the registration is done with two CCD cameras and an automatic vision alignment system.

Technical characteristics:

Printer

Max. Printing area: 210 x 210 mm (8 x 8 inch)
Squeegee speed: 0-350 mm/s (0-14 inch/s)
Squeegee force: 0-250 N (0-55 lbf)
Average accuracy: +/- 5 microns (+/- 0.20 mil)
Standard screen size: 450 x 450 x 25 mm
Max. Screen size: 550 x 550 x 30 mm
Automatic vision alignment to fiducial: A model only
Quick screen registration: A model only
Touch screen an joystick table control: A model only
Average cycle time print to print: 12 s print/flood mode
Magazine height: standard 50 mm (2 inch)

Drier

Drier length: 5 m (16.4 ft)
Installed drying power: two zone dryer, 5.4 kW / zone
Max. temperature: 120 deg. C
Drying time: 5 min at 12 s cycle time

Dimensions and power requirements
App. Dimensions, (L x B x H): 6100 x 1730 x 1820 mm
Power consumption: 12 kW
Compressed air: 0.6 MPa, 200 L/min
Vacuum: -0.08 MPa (0.02 MPa absolute), 300 L/min

(optionally air / vacuum exchangers can be installed)

Available options:

Automatic paste supply: For low viscosity pastes only.
Via filling
Stencil frame for stencil tensioning and quick fixing
Custom printing tables and substrate fixing
Antistatic substrate cleaning before printing
Trough hole printing

Options for S model only

Touch screen control
Cameras in printer + cross line software for easy screen alignment

Dryer options
Double width- for double drying time

Not all possible options listed


Model selection:

S model - more suitable for all applications where print registration against previous print or via holes is not necessary.

Print quality and accuracy is identical for both models.

How to order: *

P- 200xAMx

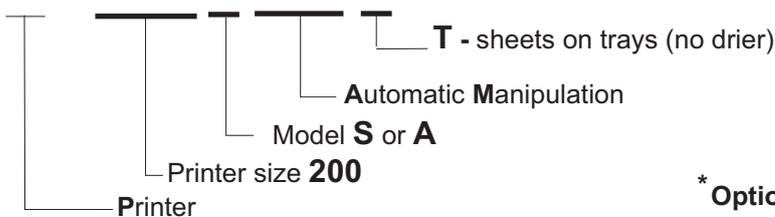

* Options and other requirements have to be specified separately.



Grajski trg 15, 360 Žužemberk, Slovenija
T +386 7 3885 200
F +386 7 3885 203
info@keko-equipment.com
www.keko-equipment.com