



CHOSEN BY LEADING
COMPONENT MANUFACTURERS
WORLDWIDE

COMPACT TAPE CASTERS

C - series



- Suitable for green ceramic thicknesses from 5 to 150 microns (0.2 to 6 mils)
- Suitable for solvent based and water based systems
- Automatic tracking of carrier film
- Compact size requiring minimum floor space
- High accuracy in thickness control and stability
- Slotted die slurry feeding to doctor blade
- Advanced slurry dosage with micrometer level control
- Stepper motor controlled automatic gap setting

**HIGH ACCURACY (CERAMIC) TAPE CASTING
ON CARRIER FILMS**

BASIC CONFIGURATION:

The CAM- C series of tape casters are designed and built to meet the most stringent customer demands where compact design is required.

A need for higher automation levels, higher accuracy and compact design, led to this truly innovative casters.

The automated continuous slurry dosage flows through a slotted die system with +/-10 micrometer (0.4 mils) slurry level height control on the casting box.

Fully automatic casting gap control, with auto zero calibration. The process can be continuously monitored on the touch screen. Preset menus can be used to quickly start a new casting batch.


Options:

- ceramic tape edge cutting
- double drying zones
- 2m longer drying zone
- ethernet data link option for external process monitoring
- dry tape thickness measurements

Technical specification	
Casting speed	0.1 - 6 m/min (0.3-20 ff./min) adjustable
Carrier tape width	350 mm max. (10 or 14 inch max.) depends of version
Casting width	up to 320 mm max. (8inch), or up to 300 mm max. (12 inch)
Dry tape thickness	5-150 microns (0.2 - 6 mils)
Thickness accuracy	+/- 1 micron (0.04 mils)
Carrier film thickness	20 to 75 microns
Drying	5 individual bottom heating plates, top side filtered air adjustable from room temperature to 120 deg. max
Slurry feeding	automatic by air or Nitrogen pressure
Slurry vessel	25 L (6.6 gal)

How to order: *

CAM-CXXXX

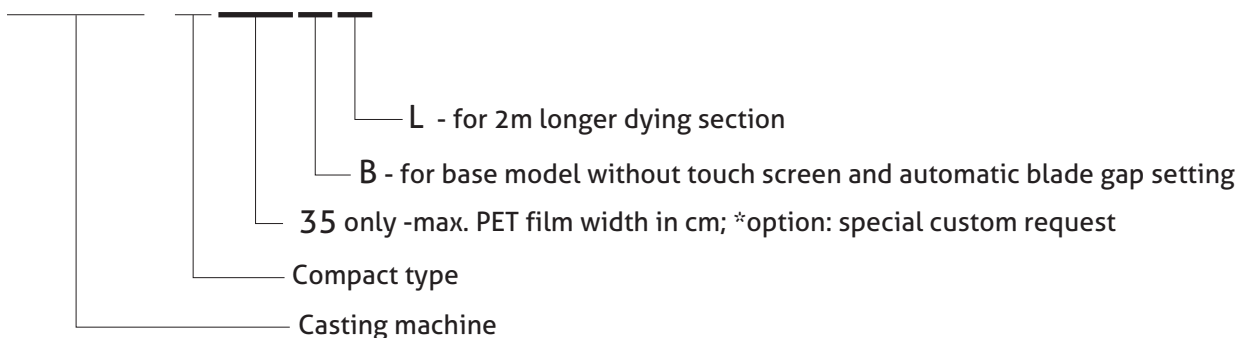

* Options and other requirements have to be specified separately.



Grajski trg 15, 360 Žužemberk, Slovenija
T +386 7 3885 200
F +386 7 3885 203
info@keko-equipment.com
www.keko-equipment.com